


BONNEVILLE 750


ly TRIUMPH

The bike that created its own legend

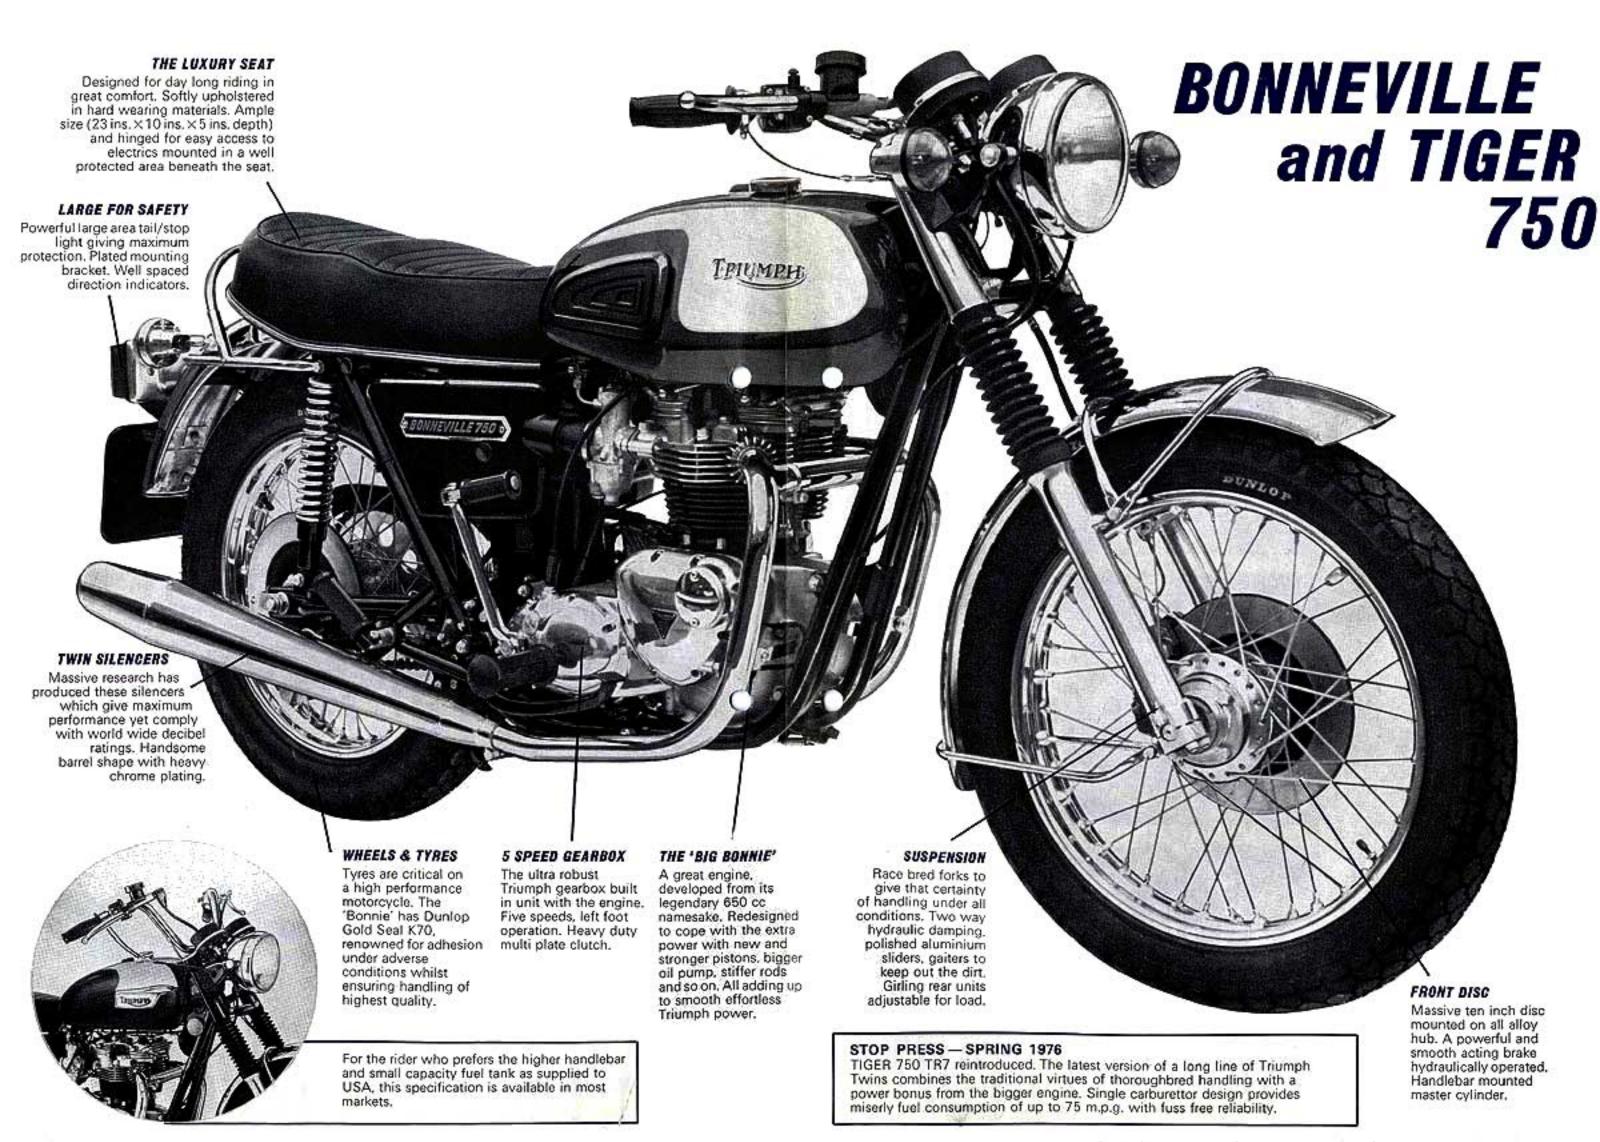


THE BONNEVILLE STORY

The Triumph 'Bonneville' is the famous British motorcycle with a name from America. This name was not just chosen from a list—it originates from a series of sensational high speed runs by American Triumph riders like Johnny Allen, Joe Dudek, Bill Johnson and Bob Leppan. All at well over 200 mph achieved on the shimmering salt lake of Bonneville in Utah USA.

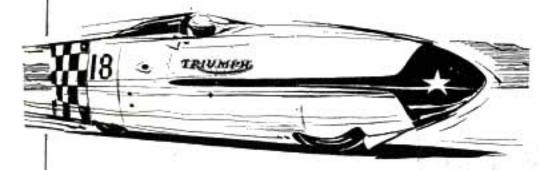

Johnny Allen started the ball rolling in 1956. His unsupercharged 650 Triumph twin clocked 214 mph taking the 'worlds fastest' off the Germans who had themselves broken the record only a short time before. The Salt flats became a happy hunting ground for Triumph riders who over the years have broken hundreds of records on the salt.

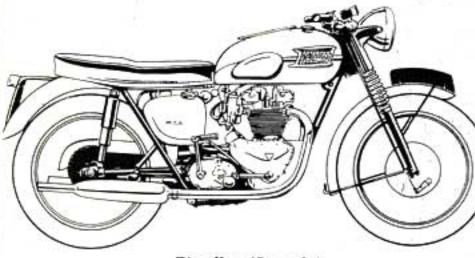

The first 'Bonnie'

So when a name was wanted for a new model that subsequently turned out to be the most celebrated Triumph of all time—it just had to be the 'Bonneville', or 'Bonnie' for short.

Today the Bonnie has grown to 750 cc. It has modern refinements like disc brakes front and rear and sophisticated instrumentation. But underneath it is the same, solid, strong 'Mans bike'. The bike that sits on the road, goes where it is pointed, never tires and delivers its performance all the way up.

BONNEVILLE The bike that created its own legend.

TRUMPIA



BONNEVILLE 750 **Specification**


Engine: 744 cc Twin OHV. Light alloy cylinder head. Valves pushrod operated from two gear driven camshafts. Alloy connecting rods with plain big end bearings. Ball and roller main bearings.


Two Amal carburetters.


Forks: Polished aluminium sliders. Two way hydraulic damping.

Rear Suspension: Swinging fork, hydraulically damped and adjustable for load.

Gearbox: Five speeds. Multi-plate clutch with bonded segments and built-in transmission shock absorber. Left foot shift.

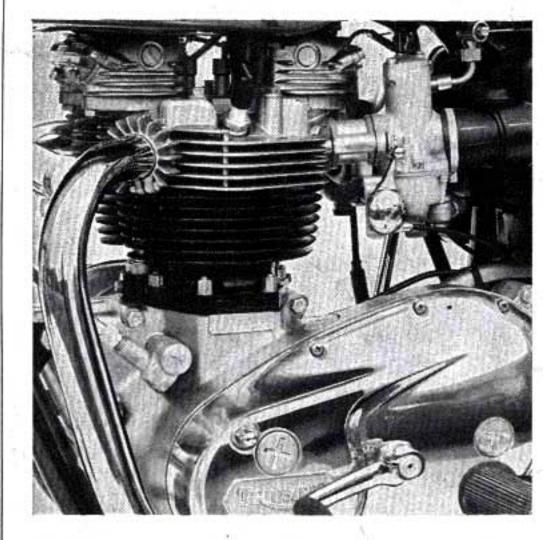

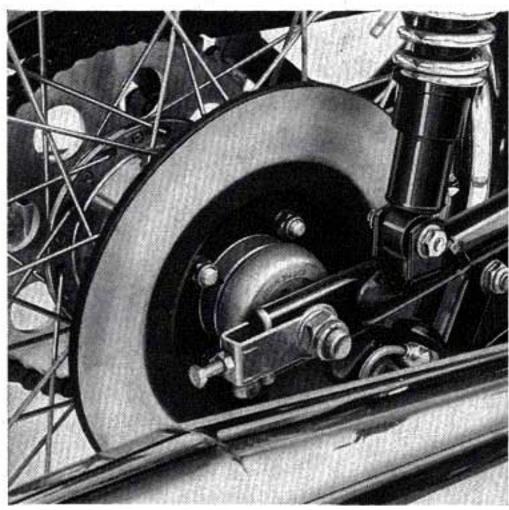

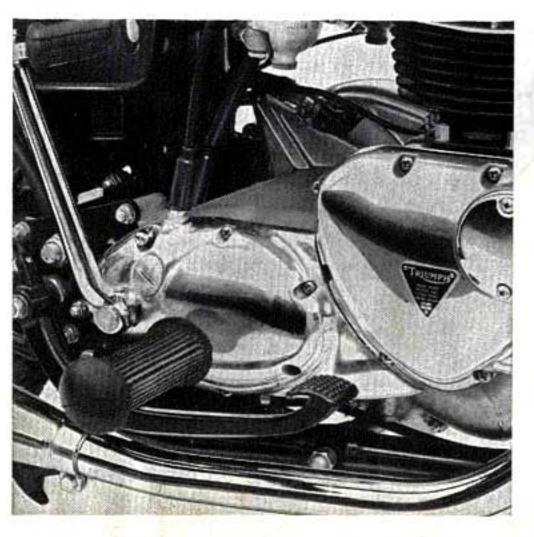

Brakes: Light alloy hubs. Triumph Lockheed hydraulic disc brakes front and rear.

Electrical and Lighting Equipment:
12 volt. One coil per cylinder
Crankshaft-mounted alternator. Master
electrical switch and handlebar switch
consoles. Powerful head and tail
lamps, direction indicators.

Frame: Welded frame with large diameter oil-containing main tube. Tapered roller steering head bearings.

Petrol Tank: All steel welded with quick release filler cap.

Twin Seat Assembly: Hinged seat for ready access to electrical equipment. Handlebars and Fittings: Chromium plated bar. Heavy duty cables with built-in adjusters.

TECHNICAL DATA

Model Number			T140V
Engine type .			OHV
Number of cyline	ders .		2
Bore/Stroke mm			76/82
Capacity cc .			744
Compression rat	io .		7.9:1
Engine sprocket			29
Clutch sprocket			58
Gearbox sprocke			20
Rear sprocket te			47
RPM @ 10 mph			625
Gear ratio 5th ge			4.70
Gear ratio 4th ge			5.59
Gear ratio 3rd ge	205		6.58
Gear ratio 2nd g		66 67	8.63
Gear ratio 1st ge			12.25
*Carburetter mal			Amal/2
Carburetter type			R930/L930
Primary chain siz	ze .	:: :::	용" Triplex
Rear chain size		200	5"×3"
Tyre size front	•		3.25 × 19
Type			K70
Tyre size rear			4·00 × 18
Type			K70
Front Brake dia.	in/mm		10/254
2 <u>22</u> 27777		• •	Disc
Type Rear Brake dia. i			10/254
	Netter in the S		Disc
Type			Red/White
Finish			Blue/W
Seat height in/m	m .	 	31/790
Wheel base in/m			56/1420
Length in/mm			871/2220
Width in/mm			29/736
Ground clearanc			7/180
Dry weight lb/ki			413/187
the state of the s			

Top photo

Fuel Imp. gall/litres ...

Oil Imp. pints/litres ...

Neat and efficient twin carburetter layout with adjacent fuel taps. Heavily finned alloy cylinder head.

*TIGER 750 TR7 fitted single carburetter

Centre photo

10 inch (254 mm) rear disc brake. Powerful Triumph Lockheed hydraulics. Right foot operated brake pedal.

.. 4/18.2

.. 5/2.8

Bottom photo

The sturdy Triumph 5 speed unit construction gearbox with polished end cover:

The issue of this brochure does not constitute an offer and illustrations and specifications described herein will vary for different countries. In line with our policy of continuous research and development we reserve the right to alter or change specification at any time without notice. Variations from stated technical data may occur due to production considerations.